

Brik Series

BBS

BRITECOR™ AC DIRECT TECHNOLOGY

**AC DIRECT LED
NO POWER SUPPLY NEEDED**




**15
YEAR
WARRANTY**

**Most Efficient AC Direct
Light Engine in the World**




PRODUCT DESCRIPTION :

- ⊗ BriteCor Adaptive AC Direct – no DC power supply
- ⊗ 450,000 hours MTBF of continuous operation
- ⊗ Up to 131 lumens per Watt measured output
- ⊗ Easily mountable
- ⊗ Constant lifetime lumen output
- ⊗ Maintenance-free
- ⊗ Low total cost of ownership
- ⊗ Tested to UL dry location standards for retrofit or new construction
- ⊗ 0-10VDC 3rd party compatible dimming optional

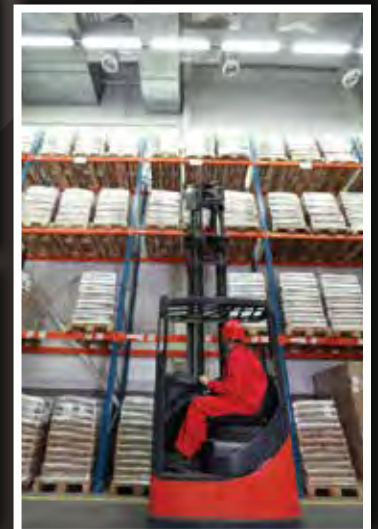

THE BRITECOR™ LIGHT ENGINE TECHNOLOGY

The BriteCor™ Light Engine is a patented Adaptive AC Direct LED Array Technology. Automatically adjusting the redundant LED mesh, BriteCor™ delivers a more efficient and reliable light without a DC power supply. Operating temperature from -40C to 40C.

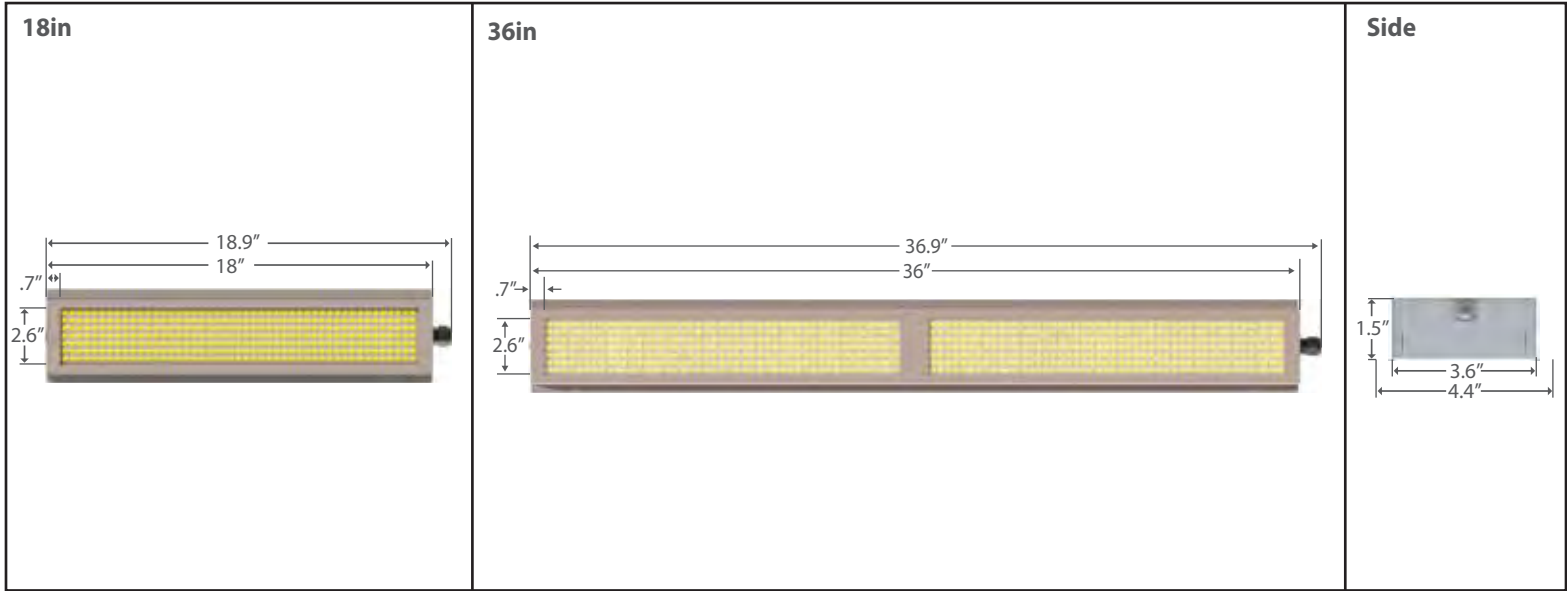

Size	Wattage	Initial Lumens (lm)
18in	16W	2095
18in	32W	4190
36in	32W	4190
36in	48W	6285
36in	64W	8380



Part Number Ordering Information:

BBS - Size	Power	Voltage (V)	Color/CRI (CT80)	Cable (C)	/ Dimmer	Cable Length	Diffuser (L)	Housing (F)
418 = 4"x18" 436 = 4"x36"	18in 16W 36in 32W 32W 48W 64W	1 = 120VAC 2 = 277VAC	First 2 - color 30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K 57 = 5700K LAST 2 - CRI 80 = 80	Standard 6' cable J1 = Jacketed Cable w/pigtail J2 = Jacketed Cable w/plug A1 = Straight Metal Clad Whip A2 = Right Angle Metal Clad Whip	(BLANK) Non Dimming ZT 0-10VDC 3rd Party Compatible	ACCESSORIES/OPTIONS: CABLE LENGTH: (BLANK) 6' (Standard) Total length (ft) CXX XX'	(BLANK) No Diffuser D Diffuser	(BLANK) White B Black S Silver

EXAMPLE: BBS-436-64-2-3580-A1/ZT C10 D B

Dimensions and specifications subject to change without notice.