


## BWB

### BriteCor Brik - Wet Location Series

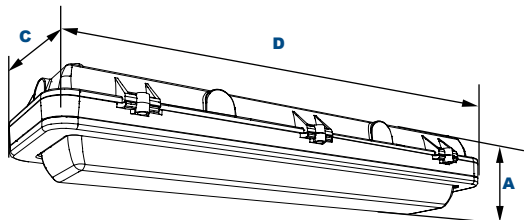

#### Dimensions

<b>Length (D)</b>	24 1/8" (614mm)
<b>Width (C)</b>	7" (178mm)
<b>Height (A)</b>	4" (102mm)
<b>Weight</b>	11.2 lbs

#### Order Information Example:

BWB-24-32-1D-5080-KL/ZT

Model	Size	Wattage	Voltage (V)	CCT/CRI	Lens (L)	Dimmer
<b>BWB</b> =BriteCor Wet Brik Linear Light	<b>24</b> =24" Length	<b>32</b> =32w <b>48</b> =48w	<b>1D</b> =120VAC <b>2D</b> =277VAC	<b>4080</b> =4000K/80CRI <b>5080</b> =5000K/80CRI	<b>KL</b> =Clear Polycarbonate Vandal-Resistant Lens <b>FR</b> =Frosted Opal Polycarbonate Vandal-Resistant Lens	<b>(Blank)</b> =None <b>ZT</b> =0-10VDC 3rd Party Compatible

#### DLC Listed:

BWB-24-32-[1D,2D]-4080-KL, BWB-24-32-[1D,2D]-5080-KL  
BWB-24-48-[1D,2D]-4080-KL, BWB-24-48-[1D,2D]-5080-KL  
For latest list go to: <https://www.designlights.org/ql>

#### Accessories & Replacement Parts:



BWBQMSS



BWBABSS\*

#### Mounting Accessories (Order separately, Field installed)

BWBQMSS Stainless Steel Quick Mount Bracket. Requires Two Brackets Per Fixture.

BWBABSS Stainless Steel Adjustable Bracket, Set of Two

BWBYSS Stainless Steel Yokes for BWB, Includes Hardware.



BWBYSS\*

\*Shown Mounted

The BriteCor Wet Brik (BWB) series wall, pendant and ceiling mount luminaire is available with clear or frosted lenses and open door frame designed to replace HID lighting systems in the 175W Class. Typical lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 12 to 25 feet can be used based on light level and uniformity requirements.

#### Specifications and Features:

##### Housing:

Heavy-Duty Die Cast Aluminum Housing and Top Frame. Tapped for Side Conduit Entry.

##### Finish:

Gray Powdercoat Finish Over a Chromate Conversion Coating.

##### Lens:

Clear Polycarbonate Vandal-Resistant Lens or Frosted Opal Polycarbonate Vandal-Resistant Lens

##### Mounting Options:

Surface Mount or Use Optional Quick-Mount Bracket, Adjustable Bracket, or Yoke

##### BriteCor Light Engine:

Patented AC Direct Driver-less Technology - No DC Power Supply

##### Wattage:

48 Watt (175W HID Equivalent)

32 Watt

##### Voltage Options:

AC Direct Technology (No DC Power Supply), 120VAC or 277VAC, 60Hz  
Dimmable Control Optional

##### Listing & Ratings:

Intertek/ETL: Listed for Wet Locations.  
Operating Temperatures: -40°C to +50°C  
IP66  
3G vibration rated per ANSI C136.31-2010  
ADA Compliant (Without Brackets)

15-Year Non-Prorated Warranty

Size	Wattage	Initial Lumens (lm)	Delivered Efficacy (lm/W)
2ft	32	3904	122
2ft	48	5760	120



Dimensions and specifications subject to change without notice.

Project Name:

Catalog Number:

Fixture Type:



LITESHEET  
ADAPTIVE AC LED TECHNOLOGY