

Wraparound Series

BWAG3

BRITECOR™ TECHNOLOGY

AC DIRECT LED
NO POWER SUPPLY NEEDED



15
YEAR
WARRANTY

APPLICATIONS



The BWAG3 is a high efficacy LED Wraparound fixture that delivers the only AC Direct LED technology on the market with an efficacy up to 152 lumens per watt. The economically designed, narrow wraparound provides reliable, efficient, and maintenance free lighting.

FEATURES & BENEFITS

- AC Direct technology - No DC power supply
- Corrosion and scratch resistant
- ETL listed for damp locations
- Clear acrylic diffuser with prismatic bottom and ribbed linear sides
- Diffuser self-aligns and hinges from either side for easy maintenance
- Available in 48" lengths - 9" nominal width
- Surface, stem or chain mountable
- Optional dimming available
- High Efficacy up to 152 lumens per watt




Wraparound Series

BWAG3

SPECIFICATIONS

Housing and ends are die-formed and embossed from cold rolled steel. Inspection knockouts provided for mounting to junction box. Driver cover snaps into place eliminating the need for tools when accessing. Diffuser hinges from either side in a lift and shift manner and is self-centering. For continuous row mounting. Knockouts are provided for stem mounting. Operating range from -40C to 40C.

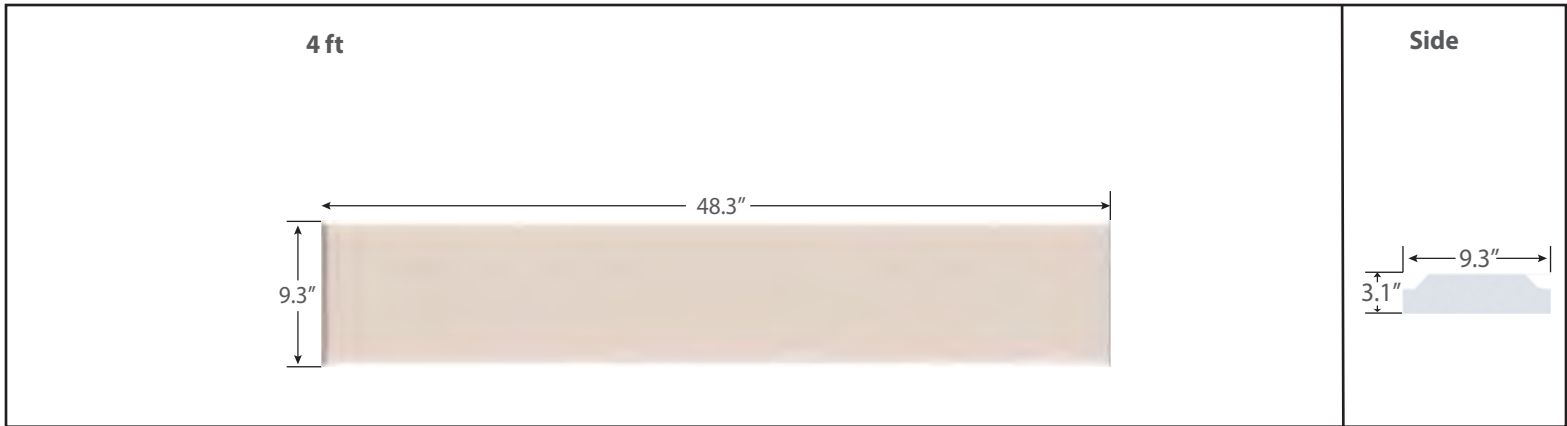

Fluorescent	Lumen Output	LiteSheet Wattage	LiteSheet Part Number	Description
(1) LAMP 32WATT T8 WITH 4' LINEAR LUMINAIRE	2800	18	BWAG3-24-18-V-CT80	4' High Efficacy Wrap Around Fixture, 18W
(2) LAMP 32WATT T8 WITH 4' LINEAR LUMINAIRE	5600	36	BWAG3-24-36-V-CT80	4' High Efficacy Wrap Around Fixture, 36W
70W METAL HALIDE 4' WRAPAROUND	5600	36	BWAG3-24-36-V-CT80	4' High Efficacy Wrap Around Fixture, 36W
(3) LAMP 32WATT T8 WITH 4' LINEAR LUMINAIRE	8400	54	BWAG3-24-54-V-CT80	4' High Efficacy Wrap Around Fixture, 54W



ORDERING INFORMATION

BWAG3	- Length	- Wattages	Voltage (v)	- Color Temp/CRI _(CT80)	- Options
	4 4 Ft	12 12 Watts/1850 Lumens 18 18 Watts/2800 Lumens 36 36 Watts/5500 Lumens 54 54 Watts/8200 Lumens	1 120V 2 277V	First 2 Digits Temp 30 3000K 35 3500K 40 4000K 50 5000K Second 2 Digits CRI 80 80 CRI	Dimmer (Blank) None ZT 0-10 VDC 3rd Party Compatible Cable (Blank) None WP6 6' Metal Clad Whip WP12 12' Metal Clad Whip Battery Backup Emergency Light (Blank) None EM1 500 Lumen EM12 1200 Lumen

Custom Wattages Also Available:
Up to 64W for 4'

EXAMPLE: BWAG3-4-12-2-4080/ZT WP6 EM1

Dimensions and specifications subject to change without notice.