

Ceiling/Wall Mount Series

BRITECOR™ TECHNOLOGY

BCMG3

AC DIRECT LED
NO POWER SUPPLY NEEDED



15
YEAR
WARRANTY

APPLICATIONS



The BCMG3 is a high efficacy, stylish ceiling/wall mounted luminaire that delivers the only AC Direct LED technology on the market with an efficacy up to 152 lumens per watt. It is available with a variety of LED combinations and sizes enhanced by linear sided acrylic diffuser. Designed for baths, kitchens, rec rooms, corridors, aisles, stairwells, over mirrors, over bulletin boards, in vanities, and in displays.

FEATURES & BENEFITS

- AC Direct technology - no DC power supply
- Back plate provided with adequate knockout and mounting holes
- Enhanced by linear sided acrylic diffuser
- Overlapping end caps for uniformity and dimensional stability
- Made in USA
- ETL listed for damp locations
- 0-10 VDC dimming optional
- High Efficacy Up To 152 Lumens per Watt




Ceiling/Wall Mount Series

BCMG3

SPECIFICATIONS

All metal parts are die formed from heavy gauge cold rolled steel with overlapping end caps. Back plate provided with adequate knockouts and mounting holes for either wall or ceiling installation. Diffuser is a linear sided prismatic lens of extruded acrylic for controlled light. Operating range from -40C to 40C.

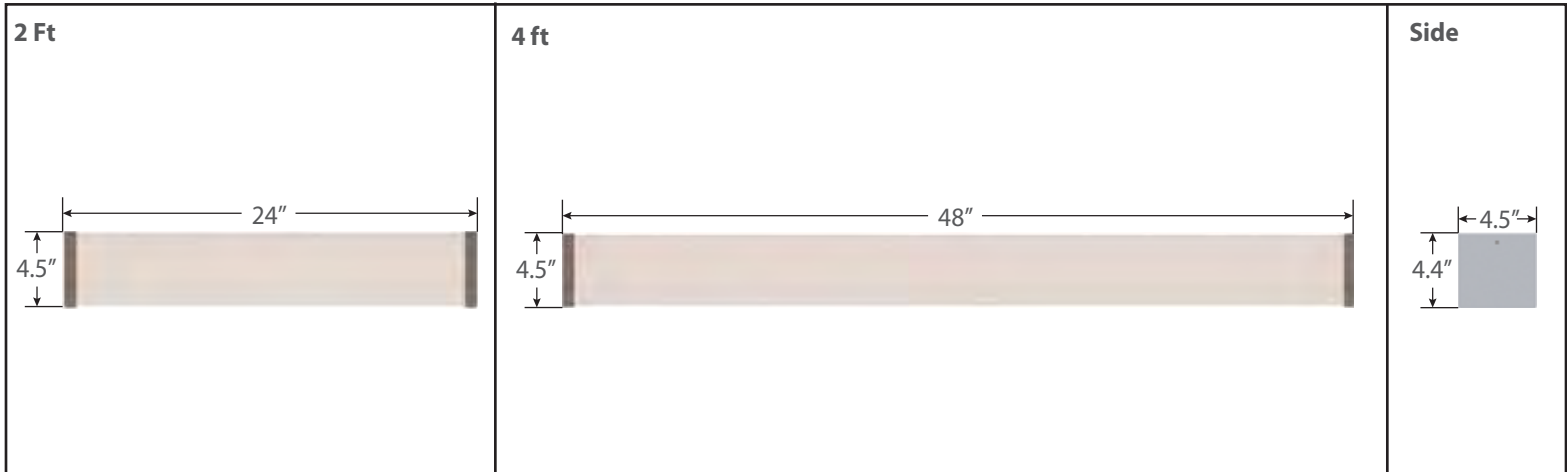

ORDERING INFORMATION

BCMG3	- Length	- Wattage	- Voltage(V)	- Color Temp/CRI(CT80)	- Options
	<ul style="list-style-type: none"> 2 2 Ft 4 4 Ft 	Wattages/Lumens 12 Watts/1850 lumens 18 Watts/2750 lumens 24 Watts/3650 lumens 36 Watts/5500 lumens 48 Watts/7300 lumens 54 Watts/8400 lumens 64 Watts/9750 lumens Custom Wattages Also Available up to 64W (XX)	<ul style="list-style-type: none"> 1 120V 2 277V 	First 2 Digits Temp 30 3000K 35 3500K 40 4000K 50 5000K 57 5700K Second 2 Digits CRI 80 80 CRI	Dimmer (Blank) None ZT 0-10VDC 3rd Party Compatible Cable (Blank) None WP6 6' Metal Clad Whip

EXAMPLE: BCMG3-4-36-1-4080/ZT WP6

Dimensions and specifications subject to change without notice.