

Curved High Bay Series

BHBC-HT

AC DIRECT LED
NO POWER SUPPLY NEEDED




15
YEAR
WARRANTY

APPLICATIONS

The **BHBC-HT** is a premier high bay fixture engineered for premium performance at high operating temperatures. A precision - formed reflector system is designed to achieve maximum light output for ceilings from 15 feet to over 40 feet high. Based on ceiling height, these fixtures can replace a fluorescent or traditional HID high bay while using up to 50% less energy. Multiple mounting options are available. The fixture is ideally suited for warehouses, manufacturing plants, sports facilities and retail spaces.

FEATURES & BENEFITS

- ⦿ AC Direct Technology - no DC power supply
- ⦿ 0-10V continuous dimming optional
- ⦿ Rated for temperatures up to 65C
- ⦿ 15 year non-prorated warranty
- ⦿ ETL listed for damp locations
- ⦿ Wire hanging kit available
- ⦿ DLC listed




Curved High Bay Series

BHBC-HT


SPECIFICATIONS

Housing is 22 gauge pre-painted steel. Reflectors are computer designed to maximize photometric performance and put the light where you need it. Access plate in the back makes wiring fast and hassle-free. Back of fixture is designed with built-in mounting holes for tong hanger and cable kit. This fixture is not designed to be surface mounted to the ceiling or wall. The standard operating temperature range for the BHBC-HT is -40C to +65C.

2 ft

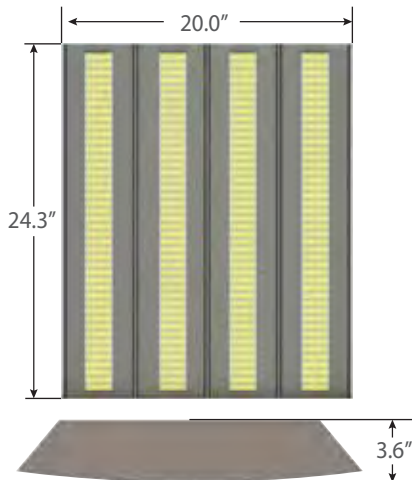

4 ft

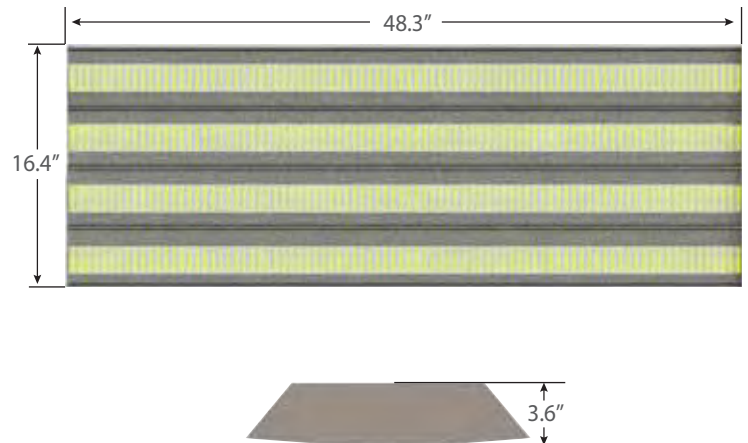

Dimensions and specifications subject to change without notice.

Size	Wattage	Lumens (lm)	Delivered Efficacy (lm/W)
2ft	64W	8320	130
2ft	96W	12480	130
2ft	128W	16640	130
4ft	128W	16000	125
4ft	192W	24000	125
4ft	256W	32000	125

ORDERING INFORMATION

EXAMPLE: BHBC-HT-2-64-1D-5080/SC CS8 WG HT

BHBC-HT	- Size	- Wattage	- Voltage(V)	- Color Temp/CRI(CT80)	- Options	Lens/Wire guard
	2' 24" Length	2ft	1 120V	First 2 Digits Temp	Dimmer (Blank) None	(Blank) None
	4' 48" Length	64 64 Watts	2 277V	30 3000K	SC SmartCor	KL Clear Lens
		96 96 Watts		35 3500K		FR Frosted Lens
		128 128 Watts		40 4000K		WG Wireguard
				50 5000K		WGFR Wireguard+ Frosted Lens
		4ft		57 5700K		WGKL Wireguard + Clear Lens
		128 128 Watts		Second 2 Digits CRI		
		192 192 Watts		80 80 CRI		
		256 256 Watts				
					Accessories	
					THK-10 10' Tong Hanger Kit with 10 feet of chain	
					BHBCWG Wireguard - No door frame	
					CM2PK Cable Mounting Kit with 2 10' cables	

*DLC Listed Models - For the most current listings consult: www.designlights.org/qpl

Notes:

- Contact factory for dimming options, emergency backup information and any help needed in configuring the light for your application.
- Dimensions and specifications subject to change without notice

