

Stik Series

BRITECOR™ TECHNOLOGY

BSS

AC DIRECT LED
NO POWER SUPPLY NEEDED




PRODUCT DESCRIPTION :

- BriteCor Adaptive AC Direct – No DC power supply
- 450,000 hours MTBF of continuous operation
- Up to 131 lumens per Watt measured output
- Easily mountable
- Constant lifetime lumen output
- Maintenance-free
- Low total cost of ownership
- Tested to UL dry location standards for retrofit, replacement or new construction
- 0-10V DC 3rd party compatible dimming optional



THE BRITECOR™ LIGHT ENGINE TECHNOLOGY

The BriteCor™ Light Engine is a patented Adaptive AC Direct LED Array Technology. Automatically adjusting the redundant LED mesh, BriteCor™ delivers a more efficient and reliable light without a DC power supply. Operating temperature from -40C to 40C.

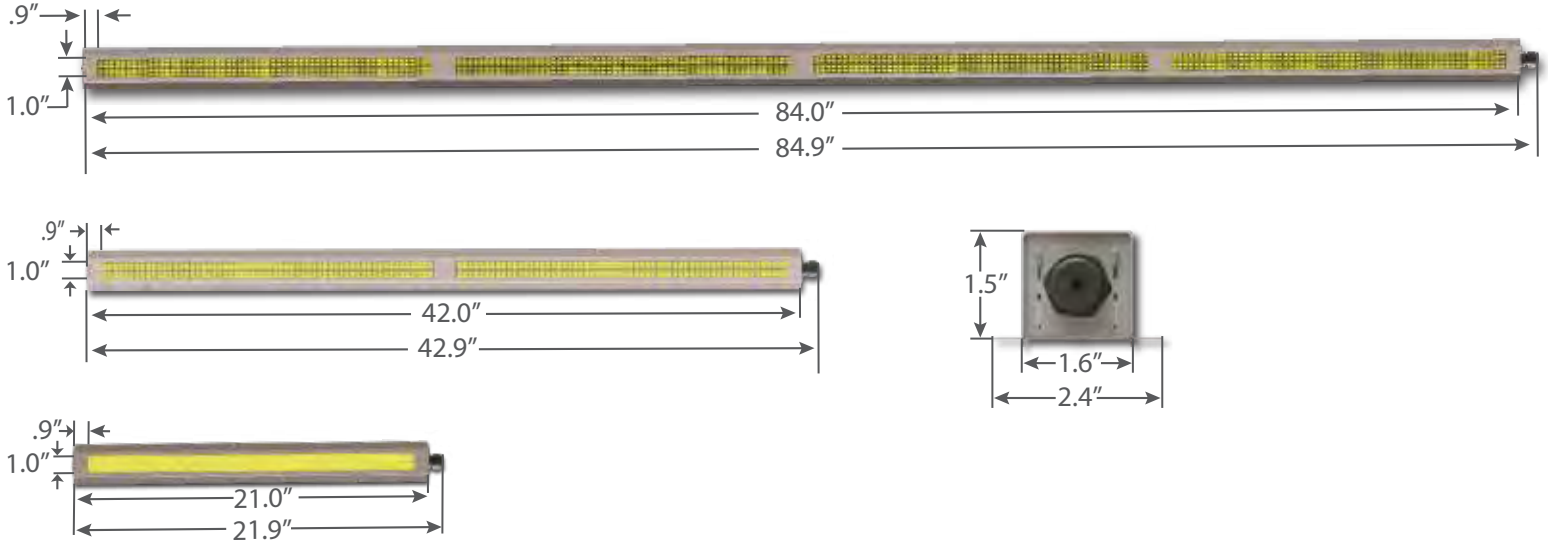

Size	Wattage	Initial Lumens (lm)
21in	20W	2620lm
42in	40W	5240lm
84in	80W	10480lm



ORDERING INFORMATION

BSS	Length	Wattage	Voltage(V)	Color Temp/CRI(CT80)	Cable(C)	Options
121	21 in	POWER (W) 21in - 20 20W 42in - 40 40W 84in - 80 80W	VOLTAGE 1 = 120VAC 2 = 277VAC	COLOR/CRI First 2 -color 30 = 3000K 80 = 80 35 = 3500K 40 = 4000K 50 = 5000K 57 = 5700K	A1 Straight Metal Clad Whip A2 Right Angle Metal Clad Whip J1 Jacketed Cable with pigtail J2 Jacketed Cable with plug	Dimmer/Diffuser (Select one) (Blank) None ZT 0-10VDC 3rd Party Compatible D Diffuser
142	42 in					Cable Length (Blank) 6' Standard CXX Total length in feet
184	84 in					Housing Color (F) (Blank) White B Black S Silver

EXAMPLE: BSS-84-80-1-5080-J1/ZT C10 B

*Results may vary. Product dimensions and specifications are subject to change without notice.

Fixtures may not have the ZT option and a diffuser - only one may be selected.

434 - 446 - 1460 | 1191 Venture Drive Suite A, Forest, VA 24551 | litesheet.com | info@litesheet.com

