


BWPG3

High Efficacy Wall Pack

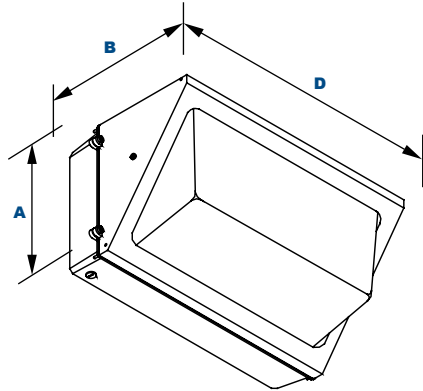

Dimensions

Width (D)	14.4" (367mm)
Length (B)	7.13" (181mm)
Height (A)	9.29" (236mm)

The LiteSheet High Efficacy Wall Pack (BWPG3) luminaire delivers the only AC Direct LED technology on the market with an efficacy up to 128 lumens per watt. The BWPG3 provides optically controlled wide spread light distribution designed to replace HID lighting systems from 70w to 250w MH or HPS. Typical wall mounted lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 12 to 18 feet can be used based on light level and uniformity requirements.

Specifications and Features:

Housing:

Die Cast Aluminum Housing & Hinged Front Frame, 1/2" Coin Plugs with O-rings for Conduit & Photocell. Gasketed.

Finish:

Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

Lens:

Molded Prismatic Borosilicate Glass Lens

Mounting Options:

Cast-in Template for Mounting Directly Over a 4" Recessed Outlet Box, or Use 1/2" Surface Conduit.

Wattage:

System: 24W, 36W, 48W, 54W and 64W

Voltage:

120VAC or 277V
AC Direct Technology - No DC Power Supply

Listing & Ratings:

Operating Temperatures: -40°C to +50°C
Dimmable option available.
15-Year Warranty.

Order Information Example:

BWPG3-24-2-4080-Z/ZT

BWPG3					
Model	Wattage	Voltage	CCT/CRI	Color	Options
BWPG3 = High Efficacy Wall Pack	24 =24W/3072 Lumens 36 =36W/4608 Lumens 48 =48W/6144 Lumens 54 =54W/6912 Lumens 64 =64W/8192 Lumens	1 =120VAC 2 =277VAC	4080 =4000K 5080 =5000K CRI =80	Z =Bronze C =Custom (Consult Factory)	ZT =0-10VDC 3rd Party Compatible

Custom Wattages Also Available up to 64W (XX)

Metal Halide Wall Pack	Lumen Output	LiteSheet Wattage	LiteSheet Part Number	Description
70W MH WALLPACK	3100	24	BWPG3-24-V-CT80-Z	Medium High Efficacy Wall Pack Fixture, 24W
100W MH WALLPACK	4600	36	BWPG3-36-V-CT80-Z	Medium High Efficacy Wall Pack Fixture, 36W
250W MH WALLPACK	7000	54	BWPG3-54-V-CT80-Z	Medium High Efficacy Wall Pack Fixture, 54W

